



METZNER AM 3800/3850

For powerful and versatile cable processing

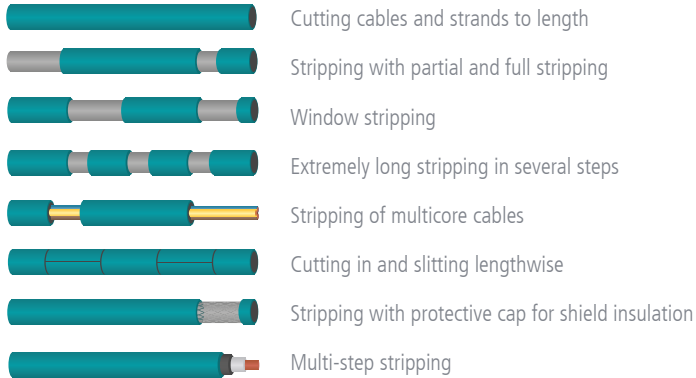

Technical Data	AM 3800	AM 3850
Cable diameter max.	20 mm	20 mm
Cable length	75 mm - 999 m	75 mm - 999 m
Cable cross-section stranded / solid wire ¹	0,5 - 70 mm ² / 0,5 - 16 mm ² 0,02-2,75 in ² / 0,02-0,62 in ²	0,5 - 70 mm ² / 0,5 - 10 mm ² 0,02-2,75 in ² / 0,02-0,39 in ²
Feed speed max. ²	180 m/min	180 m/min
Abisolierlänge 1. Seite ³ / 2nd side max.	210 mm / 140 mm 8,3" / 5,5"	210 mm / 110 mm 8,3" / 4,3"
Electrical Connection	230 V, 50/60 Hz, 2 A	230 V, 50/60 Hz, 2 A
Compressed air	6 bar	6 bar
Dimensions (LxWxH) ⁴	649 x 846 x 485 mm 25,5 x 33,3 x 19,1"	885 x 849 x 485 mm 34,8 x 33,4 x 19,1"
Weight	100 kg 220,5 lbs	130 kg 286,6 lbs
Ausstattung		
Cutting system	Double knife	Double knife
Rotary module	—	✓
Feed system	Belt	Belt
Interfaces for printing ⁵	✓	✓
Interfaces for peripheral devices	✓	✓
Interfaces for IT network ⁵	✓	✓

¹ m¹ depending on material | ² infinitely adjustable | ³ longer stripping lengths possible with multiple incisions | ⁴ without screen | ⁵ in connectio with PC

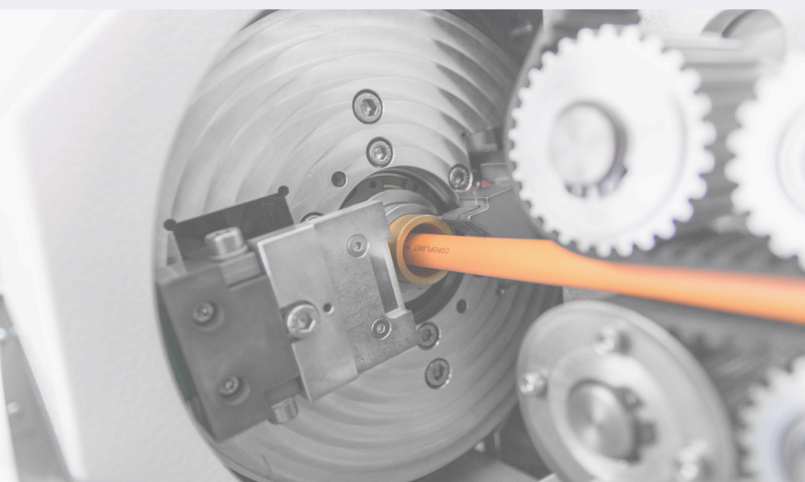

FEATURES

- Automatic cutting to length
- Multi-stage stripping (of coaxial cables)
- „Double blade cutting system
- User-friendly software with touch screen
- Cable diameter up to 20 mm